





カートリッジ (ISO 規格形)



CARTRIDGE (FOR ISO STANDARD)





カートリッジ CARTRIDGE (FOR ISO STANDARD)

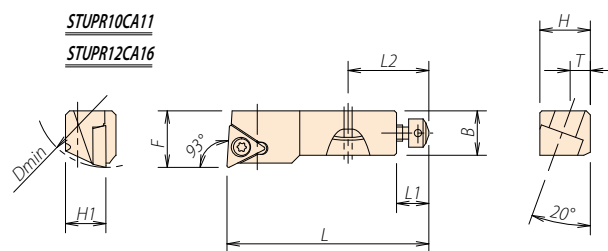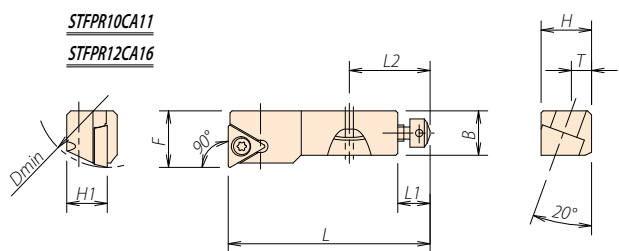

| CODE | Dmin | H1 | F | L | L1 | H | B | L2 | T | ボルトサイズ | クランプネジサイズ (角度) | チップ型番 | 標準ノーズ R |
|-------------|------|----|----|----|----|------|----|----|---|--------|----------------|------------|---------|
| STFPR10CA11 | φ 35 | 10 | 14 | 50 | 8 | 12.5 | 11 | 20 | 5 | M6 | M3 (90°) | TP**1103** | R0.4 |
| STFPR12CA16 | φ 50 | 12 | 20 | 55 | 8 | 15.5 | 16 | 20 | 6 | M6 | M4 (60°) | TP**1603** | R0.8 |
| STUPR10CA11 | φ 35 | 10 | 14 | 50 | 8 | 12.5 | 11 | 20 | 5 | M6 | M3 (90°) | TP**1103** | R0.4 |
| STUPR12CA16 | φ 50 | 12 | 20 | 55 | 8 | 15.5 | 16 | 20 | 6 | M6 | M4 (60°) | TP**1603** | R0.8 |

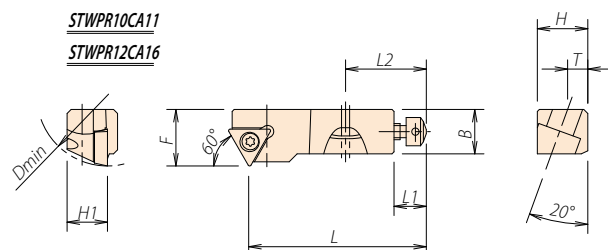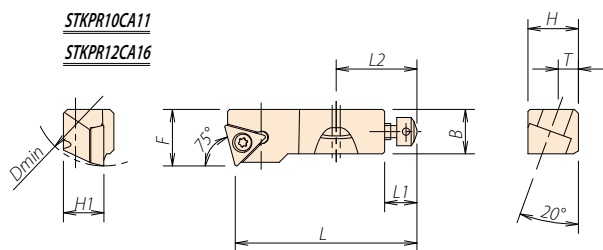

| CODE | Dmin | H1 | F | L | L1 | H | B | L2 | T | ボルトサイズ | クランプネジサイズ (角度) | チップ型番 | 標準ノーズ R |
|-------------|------|----|----|----|----|------|----|----|---|--------|----------------|------------|---------|
| STKPR10CA11 | φ 35 | 10 | 14 | 45 | 8 | 12.5 | 11 | 20 | 5 | M6 | M3 (90°) | TP**1103** | R0.4 |
| STKPR12CA16 | φ 50 | 12 | 20 | 50 | 8 | 15.5 | 16 | 20 | 6 | M6 | M4 (60°) | TP**1603** | R0.8 |
| STWPR10CA11 | φ 35 | 10 | 14 | 44 | 8 | 12.5 | 11 | 20 | 5 | M6 | M3 (90°) | TP**1103** | R0.4 |
| STWPR12CA16 | φ 50 | 12 | 20 | 47 | 8 | 15.5 | 16 | 20 | 6 | M6 | M4 (60°) | TP**1603** | R0.8 |


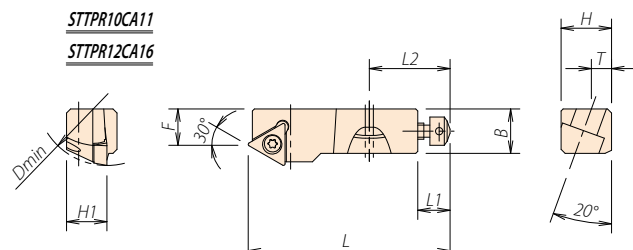
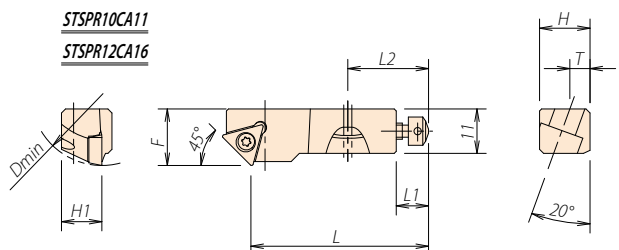


| CODE | Dmin | H1 | F | L | L1 | H | B | L2 | T | ボルトサイズ | クランプネジサイズ (角度) | チップ型番 | 標準ノーズ R |
|-------------|------|----|----|----|----|------|----|----|---|--------|----------------|------------|---------|
| STSPR10CA11 | φ 35 | 10 | 14 | 44 | 8 | 12.5 | 11 | 20 | 5 | M6 | M3 (90°) | TP**1103** | R0.4 |
| STSPR12CA16 | φ 50 | 12 | 20 | 47 | 8 | 15.5 | 16 | 20 | 6 | M6 | M4 (60°) | TP**1603** | R0.8 |
| STTPR10CA11 | φ 35 | 10 | 9 | 50 | 8 | 12.5 | 11 | 20 | 5 | M6 | M3 (90°) | TP**1103** | R0.4 |
| STTPR12CA16 | φ 50 | 12 | 13 | 55 | 8 | 15.5 | 16 | 20 | 6 | M6 | M4 (60°) | TP**1603** | R0.8 |





カートリッジ (ISO 規格形)

CARTRIDGE (FOR ISO STANDARD)

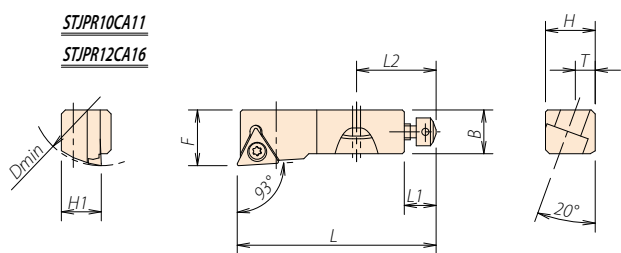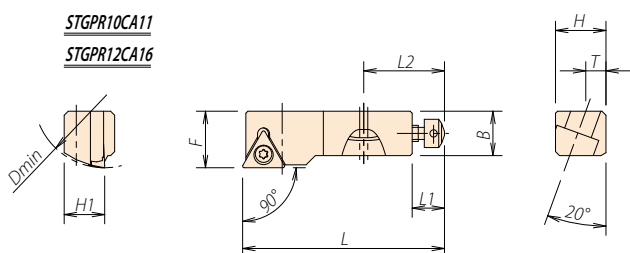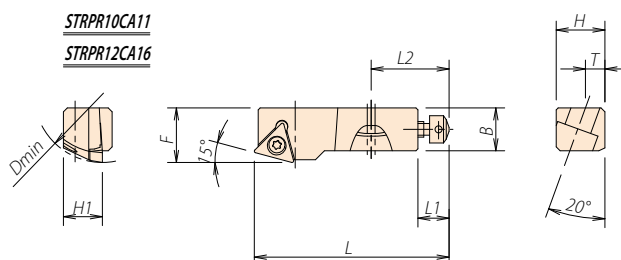

| CODE | Dmin | H1 | F | L | L1 | H | B | L2 | T | ボルトサイズ | クランプネジサイズ (角度) | チップ型番 | 標準ノーズ R |
|-------------|------|----|----|----|----|------|----|----|---|--------|----------------|------------|---------|
| STRPR10CA11 | φ 35 | 10 | 14 | 50 | 8 | 12.5 | 11 | 20 | 5 | M6 | M3 (90°) | TP**1103** | R0.4 |
| STRPR12CA16 | φ 50 | 12 | 20 | 55 | 8 | 15.5 | 16 | 20 | 6 | M6 | M4 (60°) | TP**1603** | R0.8 |
| STGPR10CA11 | φ 35 | 10 | 14 | 50 | 8 | 12.5 | 11 | 20 | 5 | M6 | M3 (90°) | TP**1103** | R0.4 |
| STGPR12CA16 | φ 50 | 12 | 20 | 55 | 8 | 15.5 | 16 | 20 | 6 | M6 | M4 (60°) | TP**1603** | R0.8 |
| STJPR10CA11 | φ 35 | 10 | 14 | 50 | 8 | 12.5 | 11 | 20 | 5 | M6 | M3 (90°) | TP**1103** | R0.4 |
| STJPR12CA16 | φ 50 | 12 | 20 | 55 | 8 | 15.5 | 16 | 20 | 6 | M6 | M4 (60°) | TP**1603** | R0.8 |

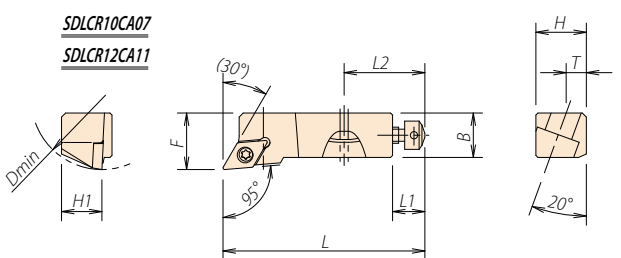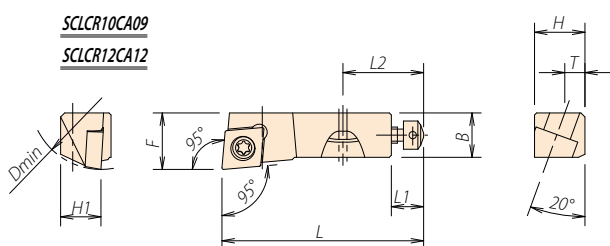

| CODE | Dmin | H1 | F | L | L1 | H | B | L2 | T | ボルトサイズ | クランプネジサイズ (角度) | チップ型番 | 標準ノーズ R |
|-------------|------|----|----|----|----|------|----|----|---|--------|----------------|------------|---------|
| SCLCR10CA09 | φ 35 | 10 | 14 | 50 | 8 | 12.5 | 11 | 20 | 5 | M6 | M4 (60°) | CC**09T3** | R0.4 |
| SCLCR12CA12 | φ 50 | 12 | 20 | 55 | 8 | 15.5 | 16 | 20 | 6 | M6 | M5 (60°) | CC**1204** | R0.8 |
| SDLCR10CA07 | φ 35 | 10 | 14 | 50 | 8 | 12.5 | 11 | 20 | 5 | M6 | M2.5 (60°) | DC**0702** | R0.4 |
| SDLCR12CA11 | φ 50 | 12 | 20 | 55 | 8 | 15.5 | 16 | 20 | 6 | M6 | M4 (60°) | DC**11T3** | R0.8 |